



GENERAL MONITORS
Protection for life.

HIGH TEMPERATURE REMOTE GAS CALIBRATOR



Features

- Easy to install
- Easier calibration of remotely located sensors
- Checks integrity of the gas sensor diffusion path
- Calibrates and detects gas up to 45 mph and 200°C

Benefits

- No electrical wiring or connections
- Easy to calibrate sensor in remote locations
- Easy to test the integrity of the sensor
- Prevents shutdowns of equipment

Description

To verify the proper operation of a catalytic combustible gas sensor, it is necessary to periodically apply a gas of known concentration to the sensor. This is usually done manually at the site with gas supplied from a small lecture bottle. As the sensor reacts to the calibration gas, adjustments are made to the monitoring system to bring its calibration into agreement with the known concentration of the calibration gas.

At times, sensors are mounted in inaccessible locations, requiring expensive catwalks or scaffolding to reach them. The High Temp Remote Gas Calibrator (HTRGC) allows the calibration gas to be applied to the catalytic bead sensor from easily accessible locations.

The HTRGC is used for blocking ambient air and re-directing methane or other light hydrocarbon gases to the catalytic bead sensor for calibration or testing sensor accuracy in various environments. The HTRGC tests or calibrates the General Monitors Catalytic Bead sensor with 50% LEL methane or other light hydrocarbon gas. The unit is capable of calibrating and detecting gases in various wind conditions (up to 45 mph) and temperatures (up to 200°C when used with high temperature sensor).

Applications

- Hard-to-reach Sensor Locations
- Compressor Stations
- Drilling Rigs
- Crude Oil Pumping Stations
- Petrochemical Plants
- Refineries
- Gas Turbines




HIGH TEMPERATURE REMOTE GAS CALIBRATOR

System Specifications

Warranty: Two years
 Part Number: 80135-1

Environmental Specifications

Temperature Range: -15°F to 400°F (-26°C to 200°C) – when used with high temperature sensor and high temperature housing
 Humidity: 5-95%, non-condensing
 Air Velocity: 45 mph maximum
 Response Time: T50 < 20 seconds, T90 < 50 seconds

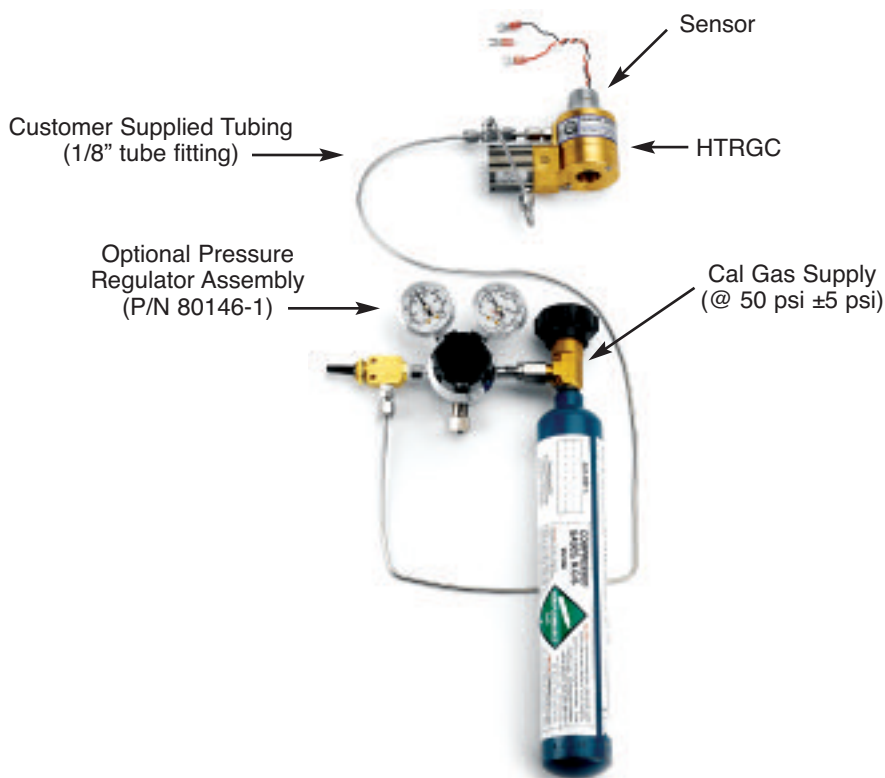

Specifications subject to change without notice.

Represented by:

General Monitors Worldwide



www.generalmonitors.com

Lake Forest, CA

26776 Simpatica Circle
 Lake Forest, California 92630
 Tel: +1-949-581-4464
 Fax: +1-949-581-1151
 Email: info@generalmonitors.com

Houston, TX

9776 Whithorn Drive
 Houston, Texas 77095
 Tel: +1-281-855-6000
 Fax: +1-281-855-3290
 Email: gmlhou@generalmonitors.com

Ireland

Ballybrit Business Park
 Galway
 Republic of Ireland
 Tel: +353-91-751175
 Fax: +353-91-751317
 Email: info@gmil.ie

Singapore

No. 2 Kallang Pudding Road
 #09-16 Mactech Building
 Singapore 349307
 Tel: +65-6748-3488
 Fax: +65-6748-1911
 Email: genmon@gmpacifica.com.sg

United Arab Emirates

P.O. Box 61209
 Jebel Ali
 Dubai
 United Arab Emirates
 Tel: +971-4-8815751
 Fax: +971-4-8817927
 Email: gmme@emirates.net.ae

United Kingdom

Heather Close
 Lyme Green Business Park
 Macclesfield, Cheshire
 United Kingdom, SK11 0LR
 Tel: +44-1625-619583
 Fax: +44-1625-619098
 Email: info@generalmonitors.co.uk